

The International Linear Collider

A Global Project*

Prepared by: Hiroaki Aihara, Jonathan Bagger, Philip Bambade, Barry Barish, Ties Behnke, Alain Bellerive, Mikael Berggren, James Brau, Philip Burrows, Massimo Caccia, Paul Colas, Dmitri Denisov, Gerald Eigen, Lyn Evans, Angeles Faus-Golfe, Brian Foster, Keisuke Fujii, Juan Fuster, Frank Gaede, Jie Gao, Paul Grannis, Christophe Grojean, Andrew Hutton, Marek Idzik, Andrea Jeremie, Kiyotomo Kawagoe, Sachio Komamiya, Tadeusz Lesiak, Aharon Levy, Benno List, Jenny List, Shinichiro Michizono, Akiya Miyamoto, Joachim Mnich, Hugh Montgomery, Olivier Napoly, Yasuhiro Okada, Carlo Pagani, Michael Peskin, Roman Poeschl, Francois Richard, Aidan Robson, Thomas Schoerner-Sadenius, Marcel Stanitzki, Steinar Stapnes, Atsuto Suzuki, Junping Tian, Maksym Titov, Marcel Vos, Nicholas Walker, Hans Weise, Andrew White, Graham Wilson, Marc Winter, Sakue Yamada, Akira Yamamoto, Hitoshi Yamamoto and Satoru Yamashita,[†]
Authors' institution and/or address

(Representing the Linear Collider Collaboration and the global ILC community.)

(Dated: December 5, 2018)

Abstract

A large, world-wide community of physicists is working to realise an exceptional physics program of electron-positron collisions with the International Linear Collider (ILC). This program will begin with a central focus on high-precision and model-independent measurements of the Higgs boson couplings. This method of searching for new physics beyond the Standard Model is orthogonal to and complements the LHC physics program. The ILC at 250 GeV will also search for direct new physics in exotic Higgs decays and in pair-production of weakly interacting particles. Polarised electron and positron beams add to the physics reach. The ILC can be upgraded to higher energy, enabling precision studies of the top quark and measurement of the top Yukawa coupling and the Higgs self-coupling.

The key accelerator technology, superconducting radio-frequency cavities, has matured. Optimised collider and detector designs, and associated physics analyses, were presented in the ILC Technical Design Report, signed by 2400 scientists.

There is a strong interest in Japan to host this international effort. A detailed review of the many aspects of the project is nearing a conclusion in Japan. Now the Japanese government is preparing for a decision on the next phase of international negotiations, that could lead to a project start within a few years. The potential timeline of the ILC project includes an initial phase of about 4 years to obtain international agreements, complete engineering design and prepare construction, and form the requisite international collaboration, followed by a construction phase of 9 years.

Supporting documents: <https://linearcollider.web.cern.ch/content/ilc-european-strategy-document>

* Version 4.0

[†] Second.Author@institution.edu

I. INTRODUCTION

A central issue in particle physics today is the search for new phenomena needed to address shortcomings of the highly successful Standard Model (SM). These new effects can manifest themselves as new particles, new forces, or deviations in the predictions of the SM derived from high-precision measurements. While the SM is theoretically self-consistent, it leaves many issues of particle physics unaddressed. It has no place for the dark matter and dark energy observed in the cosmos, and it cannot explain the excess of matter over antimatter. It has nothing to say about the mass scale of quarks, leptons, and Higgs and gauge bosons, which is much less than the Planck scale. It has nothing to say about the large mass ratios among these particles. These and other issues motivate intense efforts to challenge the predictions of the SM and search for clues to what lies beyond it.

The Higgs boson, discovered in 2012 at the Large Hadron Collider, is central to the SM, since it is the origin of electroweak symmetry-breaking and gives mass to all known elementary particles. The study of the properties and interactions of the Higgs boson is thus of utmost importance.

The International Linear Collider (ILC) has the capabilities needed to address these central physics issues. First and most importantly, it provides unprecedented precision in the measurements and searches needed to pursue these questions. Already in its first stage, the ILC will have a new level of sensitivity to test the well-defined SM expectations for the Higgs boson properties, and to advance many other tests of SM expectations. The well-defined collision energy at the ILC, together with highly polarised beams, low background levels and absence of spectator particles, will enable these precision measurements. A linear collider allows straightforward energy upgrades, which bring new processes into play. The energy upgrades will allow the ILC to remain a powerful discovery vehicle for decades. Finally, and critically, the technology is mature, ready for implementation today.

For more than twenty years the worldwide community has been engaged in a research program to develop the technology required to realise a high-energy linear collider. As the linear collider technology has progressed, committees of the International Committee for Future Accelerators (ICFA) have guided its successive stages. In the mid-1990's, as various technology options to realise a high-energy linear collider were emerging, the Linear Collider Technical Review Committee developed a standardised way to compare these technologies in terms of parameters such as power consumption and luminosity. In 2002, ICFA set up a second review panel which concluded that both warm and cold technologies had developed to the point where either could be the basis for a linear collider. In 2004, the International Technology Review Panel (ITRP) was charged by ICFA to recommend an option and focus the worldwide R&D effort. This panel chose the superconducting radiofrequency technology (SCRF), in a large part due to its energy efficiency

and potential for broader applications. The effort to design and establish the technology for the linear collider culminated in the publication of the Technical Design Report (TDR) for the International Linear Collider (ILC) in 2013 [1].

The collider design is thus the result of nearly twenty years of R&D. The heart of the ILC, the superconducting cavities, is based on pioneering work of the TESLA Technology Collaboration. Other aspects of the technology emerged from the R&D carried out for the JLC/GLC and NLC projects, which were based on room-temperature accelerating structures. From 2005 to the publication of the TDR [1] in 2013, the design of the ILC accelerator was conducted under the mandate of ICFA as a worldwide international collaboration, the Global Design Effort (GDE). Since 2013, ICFA has placed the international activities for both the ILC and CLIC projects under a single organization, the Linear Collider Collaboration (LCC),

Once the mass of the Higgs boson was known, it was established that the linear collider could start its ambitious physics program with an initial centre-of-mass energy of 250 GeV, with a reduced cost relative to that in the TDR. In this ILC250 [2], the final focus and beam dumps would be designed to operate at energies up to 1 TeV. Advances in the theoretical understanding of the impact of precision measurements at the ILC250 have justified that this operating point already gives substantial sensitivity to physics beyond the Standard Model [3, 4]. The cost estimate for ILC250 was also carefully evaluated; it is described in Appendix A. It is similar in scale to the LHC project.

In its current form, the ILC250 is a 250 GeV centre-of-mass energy (extendable up to 1 TeV) linear e^+e^- collider, based on 1.3 GHz superconducting radio-frequency (SCRF) cavities. It is designed to achieve a luminosity of $1.35 \cdot 10^{34} \text{ cm}^{-2}\text{s}^{-1}$ and provide an integrated luminosity of 400 fb^{-1} in the first four years of running. The electron beam will be polarised to 80 %, and the baseline plan includes an undulator-based positron source which will deliver 30 % positron polarisation.

The experimental community has developed designs for two complementary detectors, ILD and SiD, as described in [5]. These detectors are designed to optimally address the ILC physics goals. The detector R&D program leading to these designs has contributed a number of advances in detector capabilities with applications well beyond the linear collider program.

This report summarises the current status of this effort, describing the physics reach, the technological maturity of the accelerator, detector, and software/computing designs, plus a short discussion on the further steps needed to realise the project.

II. PHYSICS

The ILC as the ability to begin with a high-precision study of the Higgs boson couplings. At 250 GeV, the ILC also presents many opportunities to discover new parti-

cles that go beyond the capabilities of the LHC. Finally, the ILC at 250 GeV opens the door to further exploration of e^+e^- reactions at higher energies. This capability has been clearly demonstrated with detailed simulations of important physics channels including full detector effects. The ILC physics case is reviewed at greater length in the reference document [6].

The Higgs boson is a necessary element of the SM, yet it is to very large extent unknown. In the SM, the Higgs field couples to every elementary particle and provides the mass for all quarks, leptons, and heavy vector bosons. The LHC has discovered the Higgs particle and confirmed the presence of the couplings responsible for the masses of the W , Z , t , b , and τ [7]. However, many mysteries are still buried here. The Higgs couplings are not universal, as the gauge couplings are, and their pattern (which is also the pattern of lepton and quark masses) is not explained by the SM. The basic phenomenon that provides mass for elementary particles—the spontaneous breaking of the gauge symmetry $SU(2) \times U(1)$ —is not explained, and actually cannot be explained, by the SM. The Higgs boson could also couple to new particles and fields that have no SM gauge interactions and are otherwise completely inaccessible to observation. Thus, detailed examination of the Higgs boson properties should be a next major goal for particle physics experiments.

Within the SM, the couplings of the Higgs boson are specified now that the parameters of the model, including the Higgs boson mass, are known. Expected knowledge improvements of SM parameters in the 2020's will allow these couplings to be predicted to the part-per-mille level [8]. Models of new physics modify these predictions at the 10% level or below, but they can be visible to precision experiments. Most importantly, different classes of models affect the various Higgs couplings differently, so that systematic measurement of the Higgs couplings can reveal clues to the nature of the new interactions. The precision study of the Higgs boson interactions then provides a new method both to *discover* the presence of physics beyond the SM and to *learn* about its nature.

The couplings of the Higgs boson are now being studied at the LHC. The LHC experiments have made remarkable progress in measuring the couplings of the Higgs boson, and they expect impressive further progress, as documented in the HL-LHC Yellow Report [9]. The uncertainty projections from the Yellow Report are shown in Fig. 1. These measurements are very challenging. Aside from events in which the Higgs boson appears as a narrow resonance (the decays to $\gamma\gamma$ and 4ℓ), Higgs boson events are not visibly distinct from SM background events. Analyses start from signal/background ratios about 1/10 (better for VBF production, but worse for Vh production with $h \rightarrow b\bar{b}$) and then apply selections to make the Higgs signal visible. To reach the performance levels predicted in the Yellow Report, it is necessary to determine the level of suppression of SM backgrounds to better than 1% accuracy. At the same time, these projected uncertainties do not allow the LHC

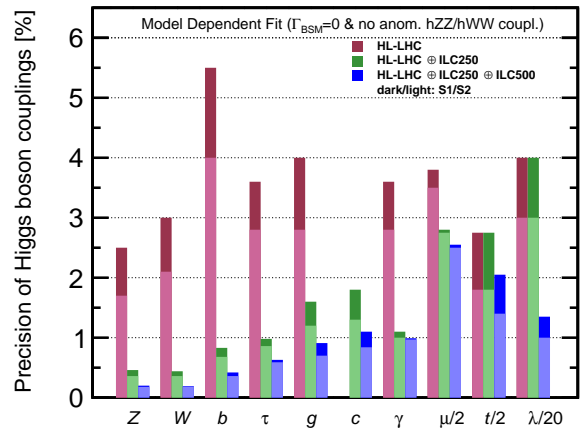


FIG. 1. Projected Higgs boson coupling uncertainties for the LHC and ILC using the model-dependent assumptions appropriate to the LHC Higgs coupling fit. The dark- and light-red bars represent the projections in the scenarios S1 and S2 presented in [9]. The scenario S1 refers to analyses with our current understanding; the scenario S2 refers to more optimistic assumptions in which experimental errors decrease with experience. The dark- and light-green bars represent the projections in the ILC scenarios in similar S1 and S2 scenarios defined in [6]. The dark- and light-blue bars show the projections for scenarios S1 and S2 when data from the 500 GeV run of the ILC is included. The same integrated luminosities are assumed as for Figure 2. The projected uncertainties in the Higgs couplings to $Z\gamma$, $\mu\mu$, tt , and the self-coupling are divided by the indicated factors to fit on the scale of this plot.

experiments to observe, for example, an anomaly of 5% in the hWW coupling to 3σ significance. To prove the presence of such small deviations, which are typical in new physics models, a different approach is required.

What is needed for a precision Higgs boson measurement program is a new experimental method in which all individual Higgs boson decays are manifest and can be studied in detail. This is provided by the reaction $e^+e^- \rightarrow Zh$ at 250 GeV in the centre-of-mass. At this CM energy, the lab energy spectrum of Z bosons shows a clear peak at 110 GeV, corresponding to recoil against the Higgs boson, on top of a small and precisely calculable SM background. Events in this peak tag the Higgs boson independently of the mode of Higgs boson decay. These events then give a complete picture of Higgs boson decays, including all SM leptonic and hadronic final states and also invisible or partially visible exotic modes.

Further, since the cross section for Higgs production can be measured independently of any property of the Higgs boson, the scale of Higgs couplings can be determined and the individual couplings can be absolutely normalised. Each individual coupling can be compared to its SM prediction.

In the description of new physics by an $SU(2) \times U(1)$ -invariant effective field theory (EFT), there exist both a remarkable complementarity and a synergy between measurements in Higgs physics, in precision electroweak

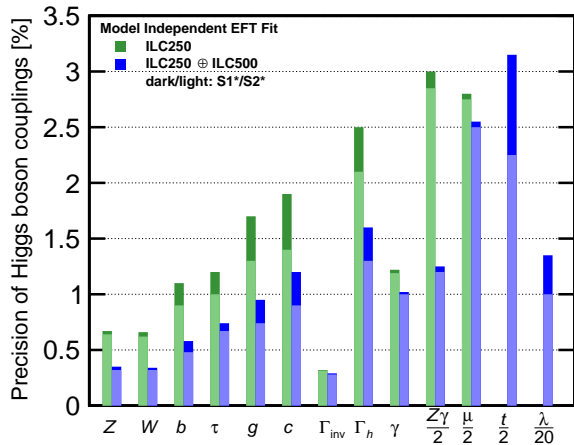


FIG. 2. Projected Higgs boson coupling uncertainties for the ILC program at 250 GeV and an energy upgrade to 500 GeV, using the highly model-independent analysis presented in [3]. This analysis makes use of data on $e^+e^- \rightarrow W^+W^-$ in addition to Higgs boson observables and also incorporates projected LHC results, as described in the text. Results are obtained assuming integrated luminosities of 2 ab^{-1} at 250 GeV and 4 ab^{-1} at 500 GeV. All estimates of uncertainties are derived from full detector simulation. Note that the projected uncertainties in the Higgs couplings to $Z\gamma$, $\mu\mu$, $t\tau$, and the self-coupling are divided by the indicated factors to fit on the scale of this plot. The scenario S1* refers to analyses with our current understanding; the scenario S2* refers to more optimistic assumptions in which experimental errors decrease with experience. A full explanation of the analysis and assumptions underlying these estimates is given in [6].

observables and in diboson production. This calls for a global approach in interpreting data from the three different sectors. The high precision in the measurement of $e^+e^- \rightarrow W^+W^-$ at an e^+e^- collider then works to improve the Higgs-coupling determination. Beam polarisation at the ILC is also a powerful tool to separate the contributions of different EFT coefficients. In addition, a number of readily interpreted Higgs boson observables that will be measured at the HL-LHC can be used, especially the ratio of branching ratios $BR(h \rightarrow \gamma\gamma)/BR(h \rightarrow ZZ^*)$. In [3], it is shown that, by the use of this information, it is possible to fit *all* relevant EFT coefficients *simultaneously*, giving a determination of Higgs boson couplings that is as model-independent as the underlying EFT description itself.

The uncertainties in cross section and $\sigma \cdot BR$ measurements that contribute to the EFT determination of the Higgs boson couplings were estimated using full simulation analyses. These analyses incorporate the detailed detector designs described in Section IV and the performance levels justified by R&D as reviewed in Section V. This gives our estimates S1*. The inputs are described in more detail in [6]. For the nominal ILC program at 250 GeV, the Higgs coupling to b quarks is expected to be measured to 1.1% accuracy and the couplings to W and Z to 0.7% accuracy. The full set of

expected uncertainties is shown in Fig. 2.

In a manner similar to the estimates in [9], a more optimistic scenario S2* is defined, assuming that detector performance can be improved with experience. The precise scheme is described in [6]. The S2* estimates are also shown in Fig. 2. The blue bars in the figure show the improvement in the errors when running at 500 GeV is also included. The discovery of any anomaly at 250 GeV can be confirmed using additional reactions such as WW -fusion production of the Higgs boson. Measurements at this level can discover—and distinguish—models of new physics over a wide space of possibilities, even for models in which the predicted new particles are too heavy to be discovered at the LHC [3].

Figure 1 compares the ILC projections to those given in the HL-LHC Yellow Report [9] in their scenarios S1 and S2. The LHC projections include model-dependent assumptions. To assist the comparison, these assumptions are imposed also in the ILC analyses. The uncertainties in the extracted Higgs couplings under these assumptions [6] are shown as the S1 and S2 values in the figure. The blue bars again show the effect of adding a data set at 500 GeV, as described in [6].

In addition to its decays predicted in the SM, the Higgs boson could have additional decays to particles with no SM gauge interactions. These decays may include invisible decays (*e.g.*, to a pair of dark matter particles χ) or partially invisible decays (*e.g.*, to $b\bar{b}\chi\chi$). The ILC can robustly search for all types of exotic decays to the parton-level of branching fractions [10].

The ILC can also search for particles produced through electroweak interactions, closing gaps that are left by searches at the LHC. An important example is the Higgsino of supersymmetric models. If the mass differences among Higgsinos are smaller than a few GeV—as predicted in currently allowed models—then Higgsinos of 100 GeV mass would be produced copiously at the LHC, but this production would not be registered by LHC triggers. In the clean environment of the ILC, even such difficult signatures as this would be discovered and the new particles studied with percent-level precision [11].

ILC precision measurements of $e^+e^- \rightarrow f\bar{f}$ processes at 250 GeV have a sensitivity to new electroweak gauge bosons comparable to (and complementary with) direct searches at the LHC. Polarisation plays a key role since it allows the electroweak couplings to be disentangled, with particular sensitivity to right-handed couplings. The reaction $e^+e^- \rightarrow b\bar{b}$ is of special interest since it either receives corrections from BSM physics that act on electroweak couplings of all fermions or from BSM physics that acts primarily on the Higgs and the heavy quark doublet (t, b), as happens in many composite models of the Higgs boson [12, 13].

The ILC at 250 GeV can be the first step to the study of e^+e^- reactions at higher energy. A linear e^+e^- collider is extendable in energy by making the accelerator longer or by increasing the acceleration gradient. Extensions to 500 GeV and 1 TeV were envisioned in the ILC Tech-

Quantity	Symbol	Unit	Initial	Upgrades
Centre-of-mass energy	\sqrt{s}	GeV	250	500 1000
Luminosity	\mathcal{L} ($10^{34} \text{cm}^{-2} \text{s}^{-1}$)		1.35	1.8 4.9
Repetition frequency	f_{rep}	Hz	5	5 4
Bunches per pulse	n_{bunch}	1	1312	1312 2450
Bunch population	N_e	10^{10}	2	2 1.74
Linac bunch interval	Δt_b	ns	554	554 366
Beam current in pulse	I_{pulse}	mA	5.8	5.8 7.6
Beam pulse duration	t_{pulse}	μs	727	727 897
Average beam power	P_{ave}	MW	5.3	10.5 27.2
Norm. hor. emitt. at IP	$\gamma\epsilon_x$	μm	5	10 16
Norm. vert. emitt. at IP	$\gamma\epsilon_y$	nm	35	35 35
RMS hor. beam size at IP	σ_x^*	nm	516	474 335
RMS vert. beam size at IP	σ_y^*	nm	7.7	5.9 2.7
Site AC power	P_{site}	MW	129	163 300
Site length	L_{site}	km	20.5	31 40

TABLE I. Summary table of the ILC accelerator parameters in the initial 250 GeV staged configuration and possible up-grades.

nical Design Report [1]. The aims of this higher-energy program are discussed in detail in [6]. They include the measurement of the top-quark mass with a precision of 40 MeV, measurements of the top-quark electroweak couplings to the per-mille level, measurement of the Higgs coupling to the top quark to 2% accuracy, and measurement of the triple-Higgs boson coupling to 10% accuracy. Higher energy stages of the ILC would also allow much more sensitive searches for new particles with electroweak interactions. Eventually, the ILC tunnel could be the host for very high gradient electron accelerators reaching energies higher than 1 TeV. The ILC promises a long and bright future beyond its initial 250 GeV stage.

III. COLLIDER

The fundamental goal of the design of the ILC is to fill the physics objectives outlined in this document with high energy-efficiency. In the design, the overall power consumption of the accelerator complex during operation is limited to 129 MW at 250 GeV and 300 MW at 1 TeV, which is comparable to the power consumption of CERN today. This is achieved by the use of SCRF technology for the main accelerator, which offers a high RF-to-beam efficiency through the use of superconducting cavities. The cavities are operated at 1.3 GHz, where high-efficiency klystrons are commercially available. At accelerating gradients of 31.5 to 35 MV/m, this technology offers high overall efficiency and reasonable investment costs, even considering the cryogenic infrastructure needed for the operation at 2°K. Some relevant parameters are given in Tab. I.

The underlying TESLA technology is mature, with a broad industrial base throughout the world, and is in use at a number of free-electron-laser facilities that are in operation (European XFEL at DESY), under construction (LCLS-II at SLAC), or in preparation (SHINE in Shanghai) in the three regions that have contributed to the ILC design. In preparation for the ILC, Japan and the U.S. have founded a collaboration for further

cost optimisation of the TESLA technology. In recent years, new surface treatments during the cavity preparation process, such as the so-called nitrogen infusion, have been developed at Fermilab and elsewhere. These offer the prospect of achieving higher gradients and lower loss rates than assumed in the TDR, using a less expensive surface-preparation scheme. This would lead to a further cost reduction over the current estimate.

The design goal of energy efficiency fits well into the “Green ILC” concept [14] that pursues a comprehensive approach to a sustainable laboratory. Current European Research and Innovation programmes include efficiency studies for the ILC and other accelerators. A model is the recently inaugurated European Spallation Source ESS in Sweden, which followed the 4R strategy: Responsible, Renewable, Recyclable and Reliable.

When the Higgs boson was discovered in 2012 and the Japan Association of High Energy Physicists (JAHEP) made a proposal to host the ILC in Japan, the Japanese ILC Strategy Council conducted a survey of possible sites for the ILC in Japan, looking for suitable geological conditions for a tunnel up to 50 km in length, and the possibility to establish a laboratory where several thousand international scientists could work and live. The candidate site in the Kitakami region in northern Japan, close to the larger cities of Sendai and Morioka, was found to be the best option. The site offers a large, uniform granite formation, with no active seismic faults, that is well suited for tunnelling. Even in the great Tohoku earthquake of 2011, underground installations in this rock formation were essentially unaffected. This underlines the suitability of this candidate site.

Figure 3 shows a schematic overview of the initial-stage accelerator with its main subsystems. The accelerator extends over 20.5 km, with two main arms that are dominated by the electron and positron main linacs, at a 14 mrad crossing angle.

Electrons are produced by a polarised electron gun located in the tunnel of the positron beam-delivery system. A Ti:sapphire laser impinges on a photocathode with a strained GaAs/GaAsP superlattice structure, which will provide 90 % electron polarisation at the source, resulting in 80 % polarisation at the interaction point. The design is based on the electron source of the SLAC accelerator.

Two concepts for positron production are considered. The baseline solution employs superconducting helical undulators at the end of the electron main linac, producing polarised photons that are converted to positrons in a rotating target, with a 30 % longitudinal polarisation. This positron-production scheme requires an operational electron linac delivering a beam close to its nominal energy of 125 GeV, which is a complication for commissioning and operation. An alternative design, the electron-driven source, utilises a dedicated S-band electron accelerator to provide a 3 GeV beam that is used to produce positrons by pair production. This source would not provide positron polarisation, but would have advantages for operation at lower electron beam energies

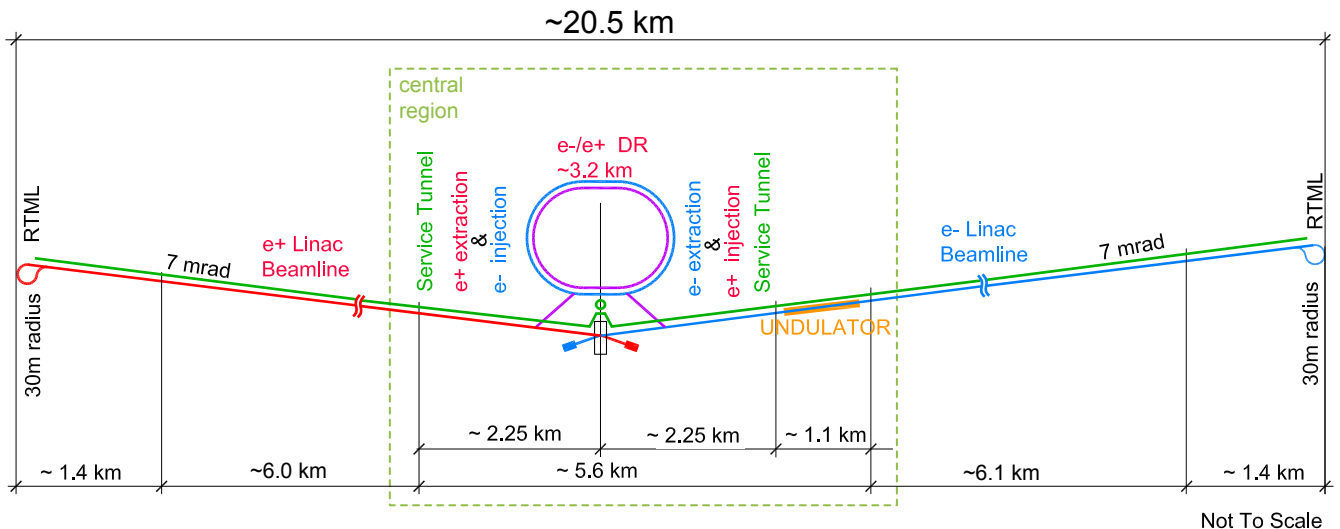


FIG. 3. Schematic layout of the ILC in the 250 GeV staged configuration.

and during commissioning. Both concepts are likely to prove viable when the requisite engineering effort can be devoted to their design. The current accelerator design is compatible with either option. A decision between the alternatives will be made before commencement of the detailed engineering design, based on their relative physics potential, costs, and technical maturity.

Electrons and positrons are injected at 5 GeV into the centrally placed 3.2 km-long damping-ring complex where their normalised emittance is reduced to 20 nm (4 μm) in the vertical (horizontal) plane within 100 msec. These emittance numbers are well in line with the performance of today's storage rings for advanced light sources. To achieve the necessary damping time constant, the damping ring is equipped with 54 superconducting wigglers.

The damped beams are transported to the beginning of the main accelerator by two low-emittance beam transport lines. Two bunch-compressor stages at 5 and 15 GeV reduce the longitudinal bunch length to 300 μm before the beams are accelerated to 125 GeV in the two main linacs.

The main linacs accelerate the beams in superconducting cavities made of niobium, operating at 1.3 GHz frequency and a temperature of 2.0 K. Each cavity has 9 cells and is 1.25 m long. The mean accelerating gradient will be 31.5 to 35 MV/m. Cavities are mounted in 12 m-long cryomodules that house 9 cavities or 8 cavities plus a quadrupole unit for beam focusing. The cryomodules provide cooling and thermal shielding and contain all necessary pipes for fluid and gaseous helium at various temperatures. No separate helium transport line is necessary. Cryomodules of this type have been in continuous operation since 2000 in the TESLA Test Facility (TTF, now FLASH), and, since 2017, 97 of these cryomodules have been in operation at the European XFEL. This proves their long-term stability. Cost and perfor-

mance estimates for the ILC cryomodules are based on the experience from these facilities, and thus can be regarded with high confidence.

The radiofrequency (RF) power for the cavities is generated by commercially available 10 MW klystrons with an efficiency of 65%. The pulse modulators will use a new, modular and cost-effective semiconductor design developed at SLAC, the MARX modulator.

The cryogenic system design is planned with six cryo plants for the main linacs, each with a size similar to those operating at CERN (8 plants for the LHC), DESY (for HERA/ XFEL) and Fermilab (for the Tevatron). Two smaller plants would supply the central region, including the preaccelerators of the sources and the damping rings.

Finally, the beam-delivery system focuses the beams to the required size of 516 $\mu\text{m} \times 7.7 \text{ nm}$. A feedback system, which profits from the relatively long inter-bunch separation of 554 ns, ensures the necessary beam stability. The necessary nano-beam technology and feedback control has been tested at the Accelerator Test Facility 2 (ATF-2) at KEK, where beam sizes within 10% of the goal for ILC have been demonstrated.[15]

The TDR baseline design assumed a centre-of-mass energy of $\sqrt{s} = 500 \text{ GeV}$, upgradeable to a final energy of 1 TeV. After the discovery of the Higgs boson in 2012, interest grew for an accelerator operating as a "Higgs factory" at $\sqrt{s} = 250 \text{ GeV}$, slightly above the maximum for Zh production. The design for a 250 GeV version of the ILC has recently been presented in a staging report by the LCC directorate [2] and was endorsed by ICFA.

This staged version of the ILC would have two main linac tunnels about half the length of the 500 GeV TDR design (6, instead of 11 km). Other systems, in particular the beam-delivery system and the main dumps, would retain the dimensions of the TDR design. Then the ILC250 could be upgraded to energies of 500 GeV

489 or even 1 TeV with a reasonable effort, without exten-
 490 sive modifications to the central region. Recent studies
 491 of rock vibrations from tunnel excavation in a similar ge-
 492 ology indicate that the necessary additional main linac
 493 tunnels could be largely constructed during ILC opera-
 494 tion, so that an energy upgrade could be realised with an
 495 interruption in data taking of only about 2 years, com-
 496 patible with a smooth continuation of the physics pro-
 497 gramme.

498 Another upgrade option, which could come before or
 499 after an energy upgrade, is a luminosity upgrade. Dou-
 500 bling the luminosity by doubling the number of bunches
 501 per pulse to 2625 at a reduced bunch separation of 366 ns
 502 would require 50% more klystrons and modulators and
 503 an increased cryogenic capacity. The damping rings
 504 would also permit an increase of the pulse repetition rate
 505 from 5 to 10 Hz. This would require a significant increase
 506 in cryogenic capacity, or running at a reduced gradient
 507 after an energy upgrade. The projections for the physics
 508 potential of the ILC250 are based on a total integrated
 509 luminosity of 2 ab^{-1} , which assumes at least one lumi-
 510 nosity upgrade.

511 IV. DETECTORS 549

512 The detector concepts proposed for the ILC have been
 513 developed over the past 15 years in a strong international
 514 effort. They reflect the requirements placed on the detec-
 515 tors from the science, and have folded in the constraints
 516 from the design of the machine, in particular the special
 517 properties of the interaction region. They incorporate
 518 the results of the R&D effort described in the following
 519 Section.

520 The main guiding principles are:

- 521 • The detector must have excellent track momentum
 522 resolution, of about $2 \times 10^{-5} \text{ GeV}^{-1}$. The bench-
 523 mark here is the analysis of the di-lepton mass in
 524 the process $e^+e^- \rightarrow hZ \rightarrow h\ell^+\ell^-$. This reaction
 525 allows the reconstruction of the Higgs mass, inde-
 526 pendently of its decay mode, via the reconstruction
 527 of the lepton recoil momentum. The Higgs boson
 528 mass is important in itself, but it is also a cru-
 529 cial input in the precise SM prediction of the Higgs
 530 boson properties. Stringent momentum resolution
 531 requirements have to be met to meet the mass res-
 532 olution goal.
- 533 • Many physics measurements depend on the flavor
 534 identification of heavy quarks and leptons. For this,
 535 very powerful vertex detectors are needed. Both for
 536 the known Higgs boson and, typically, for extended
 537 Higgs particles, the most prominent decays are to
 538 third-generation species. Many other physics pro-
 539 cesses also lead to complex final states containing
 540 bottom or charm quarks. A superb vertex detec-
 541 tor is needed to reconstruct these long-lived par-
 542 ticles with specificity and high efficiency. For ex-
 543 ample, the position of the reconstructed secondary

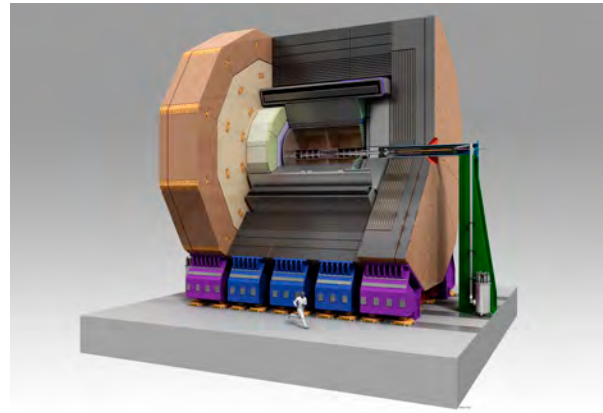


FIG. 4. The ILD detector concept.

vertex should be found with a precision of better
 than $4 \mu\text{m}$.

- The momenta of the full set of final-state parti-
 cles are best reconstructed with the Particle Flow
 Algorithm (PFA). This technique combines the in-
 formation from the tracking systems and from the
 calorimetric systems to reconstruct the energy and
 the direction of all charged and neutral particles in
 the event. To minimise overlaps between neighbor-
 ing particles, and to maximize the probability to
 correctly combine tracking and calorimeter infor-
 mation, excellent calorimeters with very high gran-
 ularity are needed. The agreed-upon goal is a jet
 energy resolution of 3% – an improvement of about
 a factor of two from the equivalent number for the
 LHC detectors.
- Many physics signatures predict some undetectable
 particles which escape from the detector. These can
 only be reconstructed by measuring the missing en-
 ergy and 3-momentum in the event. This requires
 that the detector is as hermetic as possible. Par-
 ticular care must be given to the region at small
 angles surrounding the beampipe.

Compared to the last large-scale detector project in
 particle physics, the construction and upgrade of the
 LHC detectors, the emphasis for linear collider detec-
 tors is shifted towards ultimate precision. This requires
 detector technologies with new levels of performance. It
 also requires the minimisation of dead material in the
 detector at an unprecedented level, with strict manage-
 ment and control of services and, in particular, ther-
 mal management of the detector concept. As a bench-
 mark, the total material in front of the electromagnetic
 calorimeter should not exceed a few percent of a radia-
 tion length. Significant technological R&D was needed
 to demonstrate the feasibility of this goal.

Over the last decade, two detector concepts have
 emerged from the discussions and studies in the com-
 munity. Both are based on the assumption that the

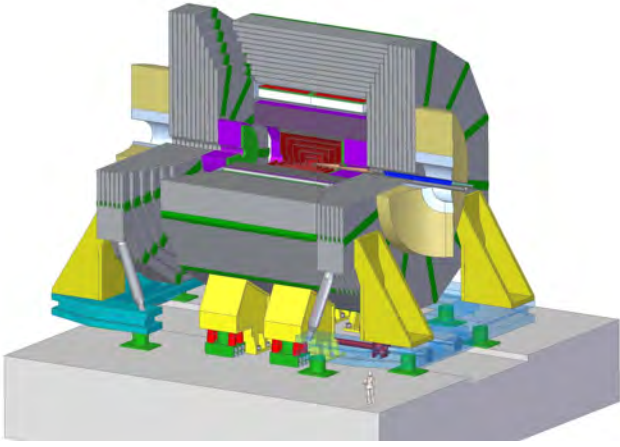


FIG. 5. The SiD detector concept.

particle-flow technique will play a central role in the event reconstruction. Both, therefore, have highly granular calorimeters, placed inside the solenoid coil, and excellent trackers and vertexing systems. The two approaches differ in the choice of tracker technology, and in the approaches taken to maximise the overall precision of the event reconstruction. ILD (Fig. 4) has chosen a gaseous central tracker, a time projection chamber, combined with silicon detectors inside and outside the TPC. SiD (Fig. 5) relies on an all-silicon solution, similar to the LHC detectors, although with much thinner silicon layers. ILD tries to optimise the particle-flow resolution by making the detector large, thus separating charged and neutral particles. SiD keeps the detector more compact, and compensates by using a higher central magnetic field. Both approaches have demonstrated excellent performance through prototyping and simulation, meeting or even exceeding the requirements.

The ILC infrastructure has been designed to allow for two detectors, operated in a so-called push-pull mode. The detectors are mounted on movable platforms, which can be moved relatively quickly in and out of the beam. The goal is to exchange the detectors in the IP and be ready to take data within one day.

This baseline design with two detectors and a push-pull arrangement has distinct scientific advantages over a potential alternative of only one detector. It is also much less expensive than the previously considered alternative of having two separate interaction points with dedicated detectors. The scientific advantages arise from the complementarity of the detectors, the competition between detector teams, the opportunity for independent cross-checks of new results, and the likely larger community of participants in the scientific program.

For both detector concepts, communities have self-organised and pre-collaborations have formed. Over the last ten years, these organisations have pushed both concepts to a remarkable level of maturity. In close interaction with the different groups performing detector R&D from around the world, they have demonstrated the feasibility of building and operating such high-precision de-

tectors.

European groups have played a central role in these efforts. The ILD concept group is formed from some 70 groups from around the world, with more than half coming from Europe. The SiD collaboration has a strong basis in the Americas, but also relies on significant participation from European groups. Major contributions to the development of all sub-systems have come from Europe. Significant technological breakthroughs, for example in the area of highly granular calorimeters, are strongly driven by European groups.

An important aspect of the detector concept work has been the integration of the detector into the collider and into the proposed site. The location of the experiment in an earthquake-prone area poses challenges which have been addressed through R&D on detector stability, support and service. The scheme to operate two detectors in one interaction region required significant engineering work to demonstrate its feasibility. With strong support from particle physics laboratories in Europe, in particular DESY and CERN, many of the most relevant questions were answered and the feasibility of the approach demonstrated, at least in principle.

V. DETECTOR R&D

The demands from physics for high precision challenge the ILC detectors. Optimal trade-offs between granularity, material, speed and power, and ultimately resolution are needed to achieve the order of magnitude improvement in state-of-the-art required. Intensive R&D was needed to realise this performance, reliably and at minimal cost, on the subsystem level, and then within the complete, integrated detector system.[16]

Application of the Particle Flow Algorithm (PFA) for reconstruction of final-state particles, using merged tracking and calorimetric information requires study of integrated systems. Then the performance can be transferred to realistic Monte Carlo models of experiments to predict the ILC physics performance in Section II. A wide variety of calorimeter and tracking subsystems have been prototyped, including full-scale detectors operated on beam, in some cases inside a 2 T magnetic field. This has included subsystem combinations to measure PFA performance relative to system cost.

Tracking and vertexing detector development was driven by pixellated, low-material budget components with excellent momentum resolution and displaced vertex characterisation, including vertex charge, performances typically exceeding existing experiments by an order of magnitude.

Two main tracker alternatives were investigated: a TPC and silicon sensors, possibly pixelated. TPC R&D addressed mainly the single-point resolution and ion-feedback mitigation with different micro-pattern read-out systems (MicroMegas, GEM, ...), showing performance goals are reached, with an end-cap material budget of less than 30% X_0 . Silicon sensor R&D dealt with material budget; targeted momentum resolution is achieved with

681 a limited number of layers. ATLAS and CMS tracker
 682 upgrade R&D contributed, although ILC silicon tracking
 683 layers are much thinner with somewhat different solu-
 684 tions. A large-area pixelated tracker may improve per-
 685 formance over silicon-strips in dense jet environments.

686 Vertex detector R&D explored several thin, highly-
 687 granular pixel technologies (CMOS, DEPFET, FPCCD,
 688 SoI, ...) that offer the projected spatial resolution and
 689 material budget. Intensive efforts focussed on read-out
 690 systems that handle the beam-related background hit
 691 density. Performances depends on material technology
 692 and read-out architecture. Double-sided layers were also
 693 investigated establishing feasibility near an e^+e^- inter-
 694 action point.

695 PFA requirements lead to very compact, highly-
 696 granular calorimetric technologies, including low-power
 697 read-out micro-circuits with power pulsing. The CAL-
 698 ICE Collaboration studied the major issues for both elec-
 699 tromagnetic (ECAL) and hadron calorimeters (HCAL).
 700 ECAL R&D concentrated on optimised and cost-effective
 701 sensor systems, designs of low-power, pulsed, inte-
 702 grated readout electronics and effective thermal man-
 703 agement and calibration strategy, and a mechanical con-
 704 cept combining high stability with minimal dead zones.
 705 A SiW-based full-size prototype was constructed and
 706 tested extensively on particle beams. A cost-effective
 707 scintillator/photo-sensor solution was also tested.

708 HCAL prototyping emphasized efficient and precise
 709 neutral hadron shower reconstruction. Two options de-
 710 veloped with stainless steel conversion material included,
 711 scintillator tiles with silicon photo-sensors read out with
 712 analog electronics, and more highly-segmented RPCs
 713 with one or two bit signal encoding.

714 Test-beam campaigns combining various ECAL and
 715 HCAL options demonstrate the relative merits, includ-
 716 ing PFA processing. The energy and topology resolu-
 717 tion requirements have been demonstrated, including in
 718 power-pulsing operation.

719 Very forward calorimeter technologies with robust elec-
 720 tron and photon detection for luminosity and operations
 721 measurements have show satisfactory performance with
 722 1 MGy tolerance. Tungsten absorbers coupled with al-
 723 ternating GaAs sensor planes included fast feedback for
 724 beam tuning.

725 VI. SOFTWARE AND COMPUTING

726 It will be possible to meet the physics goals of the ILC
 727 programme only if the excellent detector resolution of
 728 the two proposed ILC detector concepts described above
 729 is complemented with powerful and sophisticated algo-
 730 rithms for event reconstruction and data analysis. For
 731 over a decade, the ILC community has developed and
 732 improved its software ecosystem *iLCSoft* [17], which
 733 based on the event data model LCIO [18], and the generic
 734 detector description toolkit DD4hep [19]. The *iLCSoft*
 735 tools are used by both ILC detector concepts and also
 736 by CLIC. From the start, a strong emphasis has been
 737 placed on developing flexible and generic tools that can easily

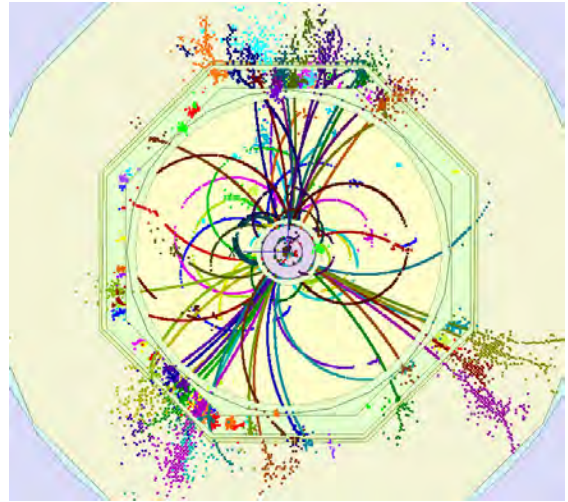


FIG. 6. Fully simulated and reconstructed $t\bar{t}$ -event in the ILC detector, showing the individually reconstructed neutral and charged particles. Note that the colour code is based entirely on the particle flow algorithm and does not use any Monte Carlo truth information.

applied to other experiments or new detector concepts. This approach of developing common tools wherever possible has helped considerably in leveraging the limited manpower and putting the focus on algorithm development that is crucial for the physics performance.

A development of particular importance is the refinement of the PFA technique that aims to identify and reconstruct every individual particle created in the event in order to choose the best possible subdetector measurement for every particle. An example of individual particles reconstructed using PFA in a $t\bar{t}$ -event is shown in Fig. 6.

Both detector concept groups have invested considerable effort into making their full-simulation models as realistic as possible. Starting from a precise description of the actual detector technology, dead material, gaps and imperfections have been added. Care has been taken to include realistic services such as cables and cooling pipes, in particular in the tracking region where the material budget has a direct impact on the detector performance. These simulation models have been used for large-scale Monte Carlo production and physics analyses for the TDR and more recent detector optimisation campaigns. Based on these studies, a realistic understanding of the expected detector performance and the physics reach of the ILC for both detector concepts has been achieved.

The development of *iLCSoft* has been a truly international activity, in which European groups, in particular DESY and CERN, have played a leading role. They should continue to do so if the ILC is approved. The next stage will strongly focus on adapting the software tools for modern hardware architectures and continue to improve the computing and physics performance of the algorithms.

774 An initial computing concept for the ILC, including a₈₃₁
 775 first estimate of the required resources, has been devel-₈₃₂
 776 oped by the LCC Software and Computing Group. This₈₃₃
 777 concept follows in general terms that of the LHC ex-₈₃₄
 778 periments and Belle II, with a strong on-site computing₈₃₅
 779 center complemented by large Grid-based computing re-₈₃₆
 780 sources distributed around the world. Due to the much₈₃₇
 781 lower event rates at the ILC compared to the LHC, the₈₃₈
 782 detectors will run in an un-triggered mode in which col-₈₃₉
 783 lision data from every bunch crossing will be recorded.₈₄₀
 784 At the experimental site, only limited computing re-₈₄₁
 785 sources are required for online monitoring, QA, and data-₈₄₂
 786 buffering for a few days. Prompt reconstruction, event₈₄₃
 787 building, and filtering of the interesting collisions will be₈₄₄
 788 performed at the main ILC campus. A few percent of₈₄₅
 789 the initial data will be distributed to major participating₈₄₆
 790 Grid sites in the world for further skimming and final₈₄₇
 791 redistribution for physics analysis. A copy of the raw₈₄₈
 792 data from all bunch crossings will be kept to allow for₈₄₉
 793 future searches for new exotic signatures. Based on de-₈₅₀
 794 tailed physics and background simulations, the total raw₈₅₁
 795 data rate estimate of the ILC is ~ 1.5 GB/s. The total₈₅₂
 796 estimated storage needs will be a few tens of PB/y. The₈₅₃
 797 computing power needed for simulation, reconstruction,₈₅₄
 798 and analysis will be a few hundred kHepSpec06. Given₈₅₅
 799 that these numbers are already smaller than what is now₈₅₆
 800 needed by the LHC experiments, and given an expected₈₅₇
 801 annual increase of 15% and 20%, respectively, for storage₈₅₈
 802 and CPU at flat budget, the overall computing costs for₈₅₉
 803 the ILC will be more than an order of magnitude smaller₈₆₀
 804 than those for the LHC.

785 VII. DISCUSSION AND SUMMARY ₈₆₃

806 The ILC has a mature technical design that is ready for₈₆₄
 807 construction. The ILC will start as a Higgs boson factory₈₆₅
 808 (ILC250). Here the clean operating environment, low₈₆₆
 809 backgrounds, and adjustable beam energies and polar-₈₆₇
 810 isations will allow model-independent measurements of₈₆₈
 811 the Higgs boson's mass and CP properties and of its ab-₈₆₉
 812 solute couplings to SM fermions and gauge bosons, most₈₇₀
 813 of them to better than 1% precision. These measure-₈₇₁
 814 ments will discriminate between the SM and many dif-₈₇₂
 815 ferent BSM models. The ILC will be sensitive to invisible₈₇₃
 816 and other exotic Higgs decays, accessing additional new₈₇₄
 817 physics models including models of Dark Matter. The₈₇₅
 818 ILC polarized beams offer additional precision tests of₈₇₆
 819 the SM, in particular for the electroweak couplings of₈₇₇
 820 right-handed fermions, which are largely unconstrained₈₇₈
 821 today.

822 The ILC can be extended to higher energies in possi-₈₈₀
 823 ble future upgrades, up to 500 GeV and 1 TeV. In these₈₈₁
 824 later stages, the ILC will give access to the properties of₈₈₂
 825 the top quark, including the top-quark Yukawa coupling,₈₈₃
 826 and to the Higgs self-coupling. Above the top-quark pro-₈₈₄
 827 duction threshold, the ILC will be a precision top-quark₈₈₅
 828 factory. Throughout its energy evolution, the ILC will be₈₈₆
 829 able to produce new BSM particles of mass up to half its₈₈₇
 830 centre-of-mass energy and to provide sensitivity to new₈₈₈

force particles Z' with masses ranging up to 7-12 TeV.

Since no new particles beyond the SM have been dis-
 covered at the LHC, the search for new physics through
 high-precision studies of the Higgs boson and the top
 quark have become urgent and compelling. These studies
 strike at the heart of the mysteries of the SM in a way
 that is orthogonal to direct new particles searches. As
 discussed in Section II, the ILC capabilities for precision
 tests will be qualitatively superior to those of the high-
 luminosity LHC. This makes the ILC a powerful comple-
 ment to future LHC particle searches, with strength to
 discover the new interactions that underlie the SM.

The goal of a precise understanding of the Higgs boson
 is an attractive one in its own right, and one readily
 communicated to our scientific colleagues in other disci-
 plines and to the general public. Together with this goal,
 the ILC provides a fully formed project proposal with a
 reasonable cost estimate similar to that of the LHC, a
 moderate time scale, and well tested technologies for its
 detector and accelerator designs.

Future circular e^+e^- colliders have been proposed as
 an alternative method for precision Higgs boson studies.
 These have the potential to deliver higher luminosity at
 energies up to about 300 GeV. However, the ILC, op-
 erated as a Higgs factory, can take advantage of beam
 polarization to achieve similar physics performance [3].
 More importantly, the possibility to easily upgrade the
 ILC to higher energies makes the Higgs factory stage of
 the ILC only the first phase of its potential for explo-
 ration.

As emphasized in the previous few sections, the ILC pro-
 posal is supported by extensive R&D and prototyping,
 both for the accelerator and for the detectors. For the
 accelerator, the successful construction and operation of
 the European XFEL at DESY gives us confidence both
 in the high reliability of the basic technology and in the
 reliability of its performance and cost in industrial real-
 ization. For the detector, an extensive course of prototyp-
 ing underlies our estimates of full-detector performance
 and cost. Some specific optimizations and technological
 choices remain. But the ILC is now ready to move for-
 ward to construction.

The ILC TDR cost has been rescaled for ILC250 [2]
 and has recently been further re-evaluated incorporat-
 ing items specific to Japanese construction and account-
 ing. The current quoted cost estimate of the ILC250 is
 shown in Appendix A. This cost has been scrutinised in
 a number of studies, most recently by a working group of
 the Japanese science agency MEXT, as described below.
 Here too, the ILC is ready to move forward.

A strong community of universities and laboratories
 world-wide is ready to realise the ILC, to develop its de-
 tectors, and to exploit its physics opportunities. The
 ILC Technical Design Report was signed by 2400 sci-
 entists from 48 countries and 392 institutes and univer-
 sity groups, as described in Appendix B. This community
 continues to prepare for the scientific program and will
 expand its efforts once the ILC is launched as a project.

889 The ILC R&D program and the construction of the 930
890 FELs based on SCRF in Europe and the US has opened 931
891 strong links between the ILC community and industry. 932
892 Very productive networking and communication has been 933
893 established between industry representatives and scien- 934
894 tists. Since 2016, all linear collider conferences have in- 935
895 cluded one-day mini-workshops to show and promote in- 936
896 dustrial opportunities. These industrial mini-workshops 937
897 have been well attended with growing interest and par- 938
898 ticipation from individual companies and from the indus- 939
899 trial associations of several key countries. 940

900 On the political side, broad interest for the ILC in 941
901 Japan has been steadily growing over many years. The 942
902 plan for hosting the ILC in Japan is being promoted by 943
903 political entities, at the Japanese Diet and at the provin- 944
904 cial levels, by a large industrial consortium (AAA), and 945
905 by representatives of the particles physics community 946
906 (JAHEP). Since 2013, the ILC project has been exam- 947
907 ined extensively by the MEXT ministry within a cautious 948
908 official procedure, in which minimising risks is of prime 949
909 importance. MEXT's ILC Advisory Panel released its 950
910 report [20] on July 4, 2018. This report summarises the 951
911 studies of the several working groups (WG) that reviewed 952
912 a broad range of aspects of the ILC. The most recent 953
913 studies include a specific review of the scientific merit 954
914 and the technical design for the ILC250. The Physics 955
915 WG scrutinised the scientific merit of the ILC250, lead- 956
916 ing to their strong and positive statement on the impor- 957
917 tance of the ILC250 to measure precisely the couplings of 958
918 the Higgs boson [20]. The TDR WG reviewed issues ad- 959
919 dressed in the Technical Design Report and the ILC250 960
920 design, including the cost estimate and technical feasi- 961
921 bility. Other working groups of the MEXT review com- 962
922 mitted on manpower needs, organisational aspects, and 963
923 the experience of previous large projects. The report of 964
924 the ILC Advisory Panel was followed by the beginning of 965
925 deliberations in a committee and technical working group 966
926 established by the Science Council of Japan (SCJ). An- 967
927 other independent committee (ILC Liaison Council), led 968
928 by leaders of the Liberal Democratic Party, the majority 969
929 party in the Diet, has now convened to encourage the 970

971

national government to proceed with the ILC.

It is an important aspect of the discussions of ILC in Japan that the ILC is seen as global project that will foster exchange between Japan and other nations. Thus, the scientific interest and political engagement of partner countries is a major concern for the Japanese authorities. For example, Japan has now begun efforts to secure US partnership in the ILC. The US Department of Energy Under Secretary for Science recently visited Japan; he attended meetings with political leaders promoting the ILC, and with the leadership of KEK.

Europe's technological expertise and its scientific strength make it a valued potential partner. Japan is approaching Europe both through bilateral discussions with individual countries, in which ILC may appear in a broader landscape embracing other advanced technology topics, and through direct engagement with CERN. It is our hope that CERN will play a leading role in the European participation in the ILC, along the lines described in the conclusions of the 2013 Update of the European Strategy, and also in a similar fashion to that developed for the European participation in the US neutrino program.

ILC is an energy-frontier project that can be started today. It will provide a new opportunity for European physicists in the time frame of the HL-LHC and beyond, as Europe plans and marshalls its resources for the next major CERN project. In this way, the ILC will play a crucial role in encouraging a new generation of researchers to enter particle physics and maintain the continuous tradition and the scientific strength of our enterprise.

In summary, a large world-wide community of particle physicists is eager to join the effort to build the ILC and its detectors, and to pursue its unique physics program. The machine technology is mature and construction-ready. The envisaged timeline of the project includes 4 years of preparation phase and 9 years of construction. The ILC will deliver unique contributions in our effort to probe beyond the Standard Model to an ultimate understanding of the fundamental laws of nature. The scientific case for the ILC has become irresistible.

-
- 972 [1] T. Behnke, J. E. Brau, B. Foster, J. Fuster, M. Harrison, 986
973 J. M. Paterson, M. Peskin, M. Stanitzki, N. Walker, and 987
974 H. Yamamoto, (2013), arXiv:1306.6327 [physics.acc-ph]. 988
975 [2] L. Evans and S. Michizono (Linear Collider Collabora- 989
976 tion), (2017), arXiv:1711.00568 [physics.acc-ph]. 990
977 [3] T. Barklow, K. Fujii, S. Jung, R. Karl, J. List, T. Ogawa, 991
978 M. E. Peskin, and J. Tian, Phys. Rev. **D97**, 053003 992
979 (2018), arXiv:1708.08912 [hep-ph]. 993
980 [4] K. Fujii *et al.*, (2017), arXiv:1710.07621 [hep-ex]. 994
981 [5] H. Abramowicz *et al.*, (2013), arXiv:1306.6329 995
982 [physics.ins-det]. 996
983 [6] M. Peskin *et al.*, (2018), arXiv:17xx.xxxx [physics.acc- 997
984 ph]. 998
985 [7] G. Piacquadio, plenary lecture at ICHEP 2018 (2018). 999
- [8] G. P. Lepage, P. B. Mackenzie, and M. E. Peskin, (2014), arXiv:1404.0319 [hep-ph].
[9] LHC, HL-LHC Yellow Report (2018).
[10] Z. Liu, L.-T. Wang, and H. Zhang, Chin. Phys. **C41**, 063102 (2017), arXiv:1612.09284 [hep-ph].
[11] M. Berggren, F. Brümmer, J. List, G. Moortgat-Pick, T. Robens, K. Rolbiecki and H. Sert, Eur. Phys. J. C **73**, 2660 (2013), arXiv:1307.3566 [hep-ph] [hep-ph].
[12] S. Funatsu, H. Hatanaka, Y. Hosotani, and Y. Orikasa, Phys. Lett. **B775**, 297 (2017), arXiv:1705.05282 [hep-ph].
[13] J. Yoon and M. E. Peskin, (2018), arXiv:1811.07877 [hep-ph].
[14] "Green ILC project," <http://green-ilc.in2p3.fr/home/>.

- 1000 [15] A 41 nm beam size was achieved at TF2; this corresponds
1001 to the ILC design goal after scaling for the different beam
1002 energies. 1011
- 1003 [16] Strube, Jan and Titov, Maxim, "Linear Collider R&D
1004 liaison report," <http://www.linearcollider.org/P-D/013>
1005 Working-groups/Detector-R-D-liaison (2018). 1014
- 1006 [17] iLCSoft authors, (2016). 1015
- 1007 [18] F. Gaede, T. Behnke, N. Graf, and T. Johnson, eConf
1008 **C0303241**, TUKT001 (2003), sLAC-PUB-9992, CHEP-
2003-TUKT001, arXiv:physics/0306114 [physics].
- [19] M. Frank, F. Gaede, C. Grefe, and P. Mato, *20th Int. Conf. on Computing in HEP and Nuc. Phys. (CHEP 2013)*, J. Phys. Conf. Ser. **513**, 022010 (2014).
- [20] "Summary of the ILC Advisory Panel's Discussions," http://www.mext.go.jp/component/b_menu/shingi/toushin/_icsFiles/afiedfile/2018/09/20/1409220_2_1.pdf (2018).

APPENDIX A: ILC250 PROJECT COSTS

Accelerator Construction	Subtotal: 634.0-702.8 B¥	(Ref. TDR)	Operating cost	Subtotal: 36.6-39.2 B¥	(Ref. TDR)
Civil engineering and architecture	110.0-129.0 B¥		Utilities and maintenance	29.0-31.6 B¥	
Accelerator	404.2-454.0 B¥		Labor	7.6 B¥	Equivalent to 638 Kperson-hours
Labor	119.8 B¥	Equivalent to 17.165 Kperson-hours			
Detectors	Subtotal: 100.5 B¥	(Ref. TDR)	Other expenditures	Subtotal: 23 B¥	(Ref. TDR)
Detector construction	76.6 B¥		Preparatory phase	23 B¥	
Labor	23.9 B¥	Equivalent to 3.651 Kperson-hours	R&D, environmental assesment, training technology transfer, management and administration		
Inaccuracy	Subtotal: 25%	(Ref. TDR)	Contingency	Subtotal: 10%	(Ref. TDR)

FIG. 7. Costs of the ILC250 project are in JPY as being re-evaluated by the Japanese MEXT report in 2018. The following exchange rates were assumed 1 Euro=115 JPY and 1 US\$=100 JPY. These numbers include the cost for civil engineering and the laboratory. Costs not included are land acquisition, living environment for overseas researchers, access roads, groundwater handling, energy service enterprise for power transmission, low power voltage supplies and computer center. The cost premium to cover the project cost with 85 % instead of 50 % confidence level (loosely speaking, the 1 σ uncertainty of the cost estimate) has been estimated to be 25 % of the estimated cost. For more detail see presentation by Sh. Michizono during LCWS 2018 at: <https://agenda.linearcollider.org/event/7889/timetable/>.

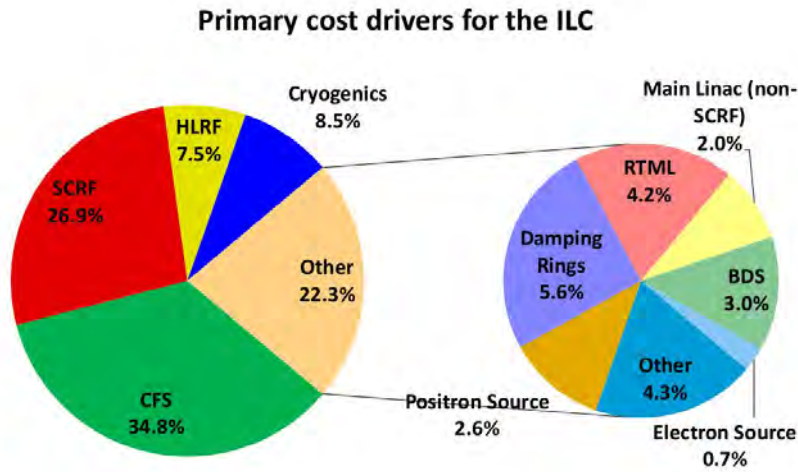


FIG. 8. Breakdown of major cost drivers of the acclerator.

APPENDIX B: DEFINITION OF THE COMMUNITY

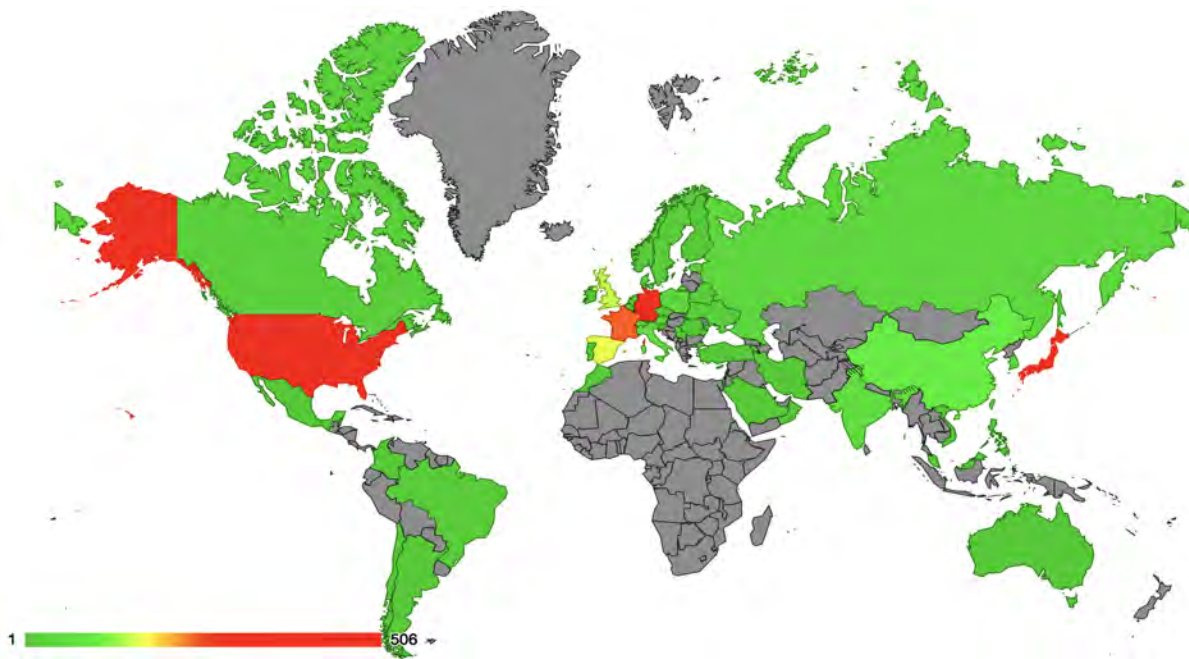


FIG. 9. World wide map distribution of signatories supporting the ILC Technical Design Report.

List of signatories of the ILC Technical Design Report

Country	Institutes	Signatories	Country	Institutes	Signatories
Japan	66	506	Denmark	1	7
United States of America	75	396	Estonia	2	6
Germany	24	303	Romania	1	5
France	22	243	Australia	2	4
Spain	19	163	Turkey	3	4
United Kingdom	23	150	Vietnam	2	4
China	7	99	Armenia	2	3
India	21	64	Cyprus	1	3
Switzerland	5	62	Finland	2	3
Italy	19	56	Iran	1	3
Poland	9	45	Morocco	1	3
Republic of Korea	14	41	Norway	2	3
Russia	8	38	Serbia	1	3
Taiwan	6	36	Slovenia	3	3
Canada	11	25	Chile	1	2
Czech Republic	3	20	Mexico	2	2
Netherlands	3	19	Portugal	1	2
Austria	2	13	Saudi Arabia	2	2
Belarus	3	11	Argentina	1	1
Belgium	4	10	Colombia	1	1
Israel	2	9	Ireland	1	1
Sweden	2	8	Malaysia	1	1
Ukraine	2	8	Oman	1	1
Brazil	6	7	Philippines	1	1

FIG. 10. Detailed list of signatories of the ILC Technical Design Report covering 2400 signatories, 48 countries and 392 Institutes/Universities.

APPENDIX C: LIST OF SUPPORTING DOCUMENTS

Description of supporting documents:

- ILC TDR documents;
- ILC project overview, being specifically produced for the European Strategy Process;
- European ILC Preparation Plan (EIPP), produced under the E-JADE project;
- linear collider Detectors R&D Liaison Report;
- Green ILC project: reports and web page.

Supporting documents web page: <https://linearcollider.web.cern.ch/content/ilc-european-strategy-document>.

APPENDIX D: GLOSSARY

Abbreviations and definitions used in the text:

- **MEXT:** Ministry of Education, Culture, Sports, Science and Technology (<http://www.mext.go.jp/en/>).
- **Japanese National DIET:** The National Diet is Japan's bicameral legislature. It is composed of a lower house called the House of Representatives, and an upper house, called the House of Councillors.
- **ICFA:** International Committee for Future Accelerators (<http://icfa.fnal.gov/>).
- **JAHEP:** Japanese Association of High Energy Physics.
- **European XFEL:** The European X-Ray Free-Electron Laser Facility (European XFEL) at DESY (Hamburg, Germany) (<https://www.xfel.eu/>).
- **LCLS-II:** The hard X-ray free-electron laser at SLAC (Stanford, USA) (<https://portal.slac.stanford.edu/sites/lcls-public/lcls-ii/Pages/default.aspx>).
- **E-JADE:** The Europe-Japan Accelerator Development Exchange Programme. E-JADE is a Marie Skłodowska-Curie Research and Innovation Staff Exchange (RISE) action, funded by the EU under Horizon2020 (<https://www.e-jade.eu/>).
- **AAA:** The Japanese Advanced Accelerator Association promoting science and technology (<http://aaasentan.org/en/association/index.html>).
- **CALICE Collaboration:** R&D group of more than 280 physicists and engineers from around the world, working together to develop a high granularity calorimeter system optimised for the particle flow measurement of multi-jet final states at the ILC running, with centre-of-mass energy between 90 GeV and 1 TeV (<https://twiki.cern.ch/twiki/bin/view/CALICE/WebHome>).